

SIREN M19


INSTALLATION MANUAL

MOUNTING: Select a suitable position to mount the unit, which satisfies the following criteria: highly prominent for maximum deterrence; additional shelter (e.g. under the eaves) is an advantage; high enough to be out of normal reach to deter tampering; safe ladder access; good cable access.

NOTE: Equipment must be mounted vertically on a wall in order to increase the resistance to the effects of weather.

WIRING: Connect the unit to the control panel as follows:

GND	Negative supply terminal.
#1	Positive supply terminal. 1-st sounder tone – continuous beep.
#2	Positive supply terminal. 2-nd sounder tone – alternating beep.
SW	Tamper switch terminal.
SW	Tamper switch terminal.

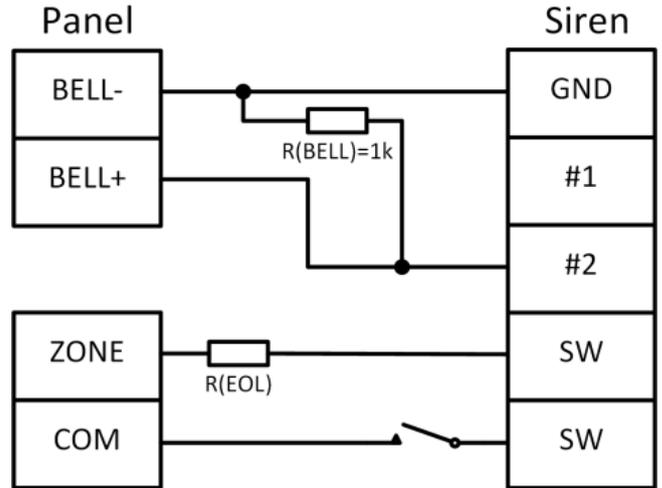

SIREN M19

INSTALLATION MANUAL

MOUNTING: Select a suitable position to mount the unit, which satisfies the following criteria: highly prominent for maximum deterrence; additional shelter (e.g. under the eaves) is an advantage; high enough to be out of normal reach to deter tampering; safe ladder access; good cable access.

NOTE: Equipment must be mounted vertically on a wall in order to increase the resistance to the effects of weather.

WIRING: Connect the unit to the control panel as follows:

GND	Negative supply terminal.
#1	Positive supply terminal. 1-st sounder tone – continuous beep.
#2	Positive supply terminal. 2-nd sounder tone – alternating beep.
SW	Tamper switch terminal.
SW	Tamper switch terminal.

