


POWER: 20VA

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV-1p
- Increased humidity resistance

Manufacturing standard: EN 61558

- Safety insulation transformer
- Max. ambient temperature: t_a 50°C
- Insulation class: B 130°C
- Double insulated
- Degree of protection: IP00
- Conditionally short-circuit safe

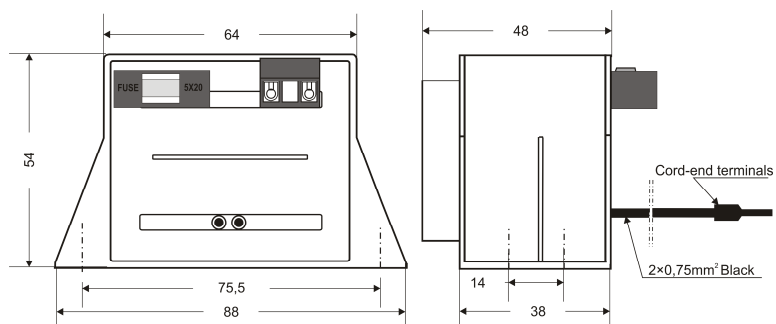

Application

- For power supply of safeguarding centres
- For power supply of other electrical devices

Usage features

- Direct fixing possibility to metal part.
- Built-in primary fuse.
- Terminal block connection at primary side with max. 1.5 mm² wire
- Connection at secondary side with 0.75 mm² and 40 cm long wire

Model number	Primary voltage	Secondary voltage	Secondary current
ME.TRE-20.60112/BSV 20VA	230V-50Hz	12 V	1.66 A
ME.TRE-20.60116/BSV 20VA	230V-50Hz	16.5 V	1.21 A
ME.TRE-20.60118/BSV 20VA	230V-50Hz	18 V	1.11 A
ME.TRE-20.60124/BSV 20VA	230V-50Hz	24 V	0.83 A
ME.TRE-20.60140/BSV 20VA	230V-50Hz	40 V	0.50 A
Prescribed primary circuit fuse: 125 mA T			
Tolerance of secondary voltage: 5%			